


RBL ROTARY VALVE

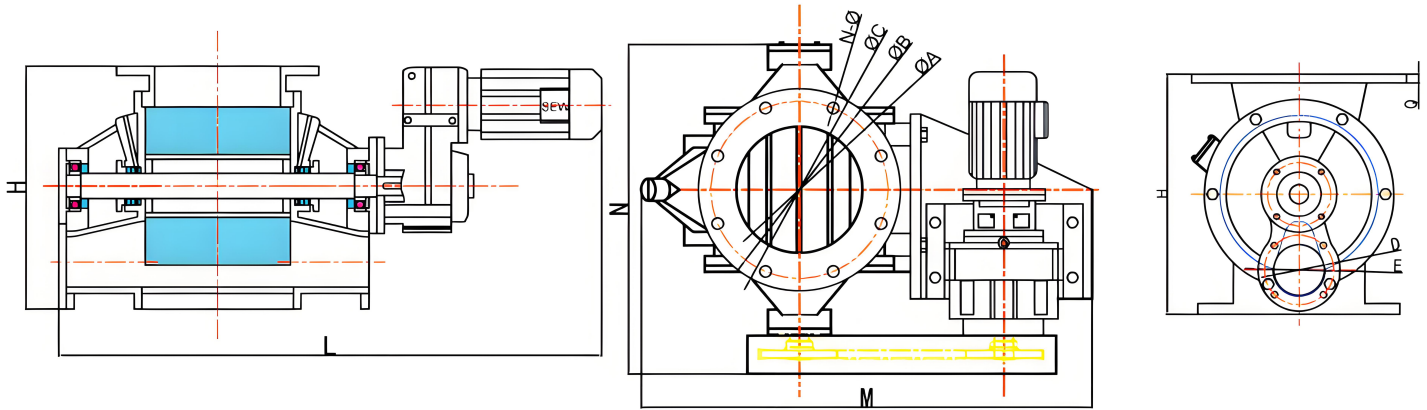

Model	Ltr/Rev	Inlet			H	D	E
		C	B	A			
RBL200	6 L/Rev	340	295	200	385	80	130
RBL250	10 L/Rev	395	350	250	450	100	150
RBL300	16 L/Rev	445	400	300	520	125	180

*Note: Technical modification are possible, dimensions in mm

Welcome to customize non-standard rotary valve !!

Features and Function

- Standard Valves manufactured in Stainless Steel 304
- Drilled flanges in accordance with GB PN10, ANSI 150#, DIN PN10, JIS10K
- Close vane tolerances ensure high sealing and feeding efficiency and minimum air leakage.
- Outboard bearings are standard and a full range of shaft seal options is available
- Excellent performance in high-temperature Applications up to 250°C.
- Pressure differentials up to 1.5bar (21PSI)

Options

- 304,316,304L,316L cast stainless steel valve housing and endplate
- 6 vane, 10 vane or 12 vane rotor.
- Rotor design: close ended, and adjustable-tip Replaceable rotor wear tips
- Interior coatings: hard chrome, tungsten, and Teflon
- Air purge shaft sealing
- Valve housing vent ports.
- Accessories: speed monitor, vent box, Air purge regulation station