


RVS ROTARY VALVE

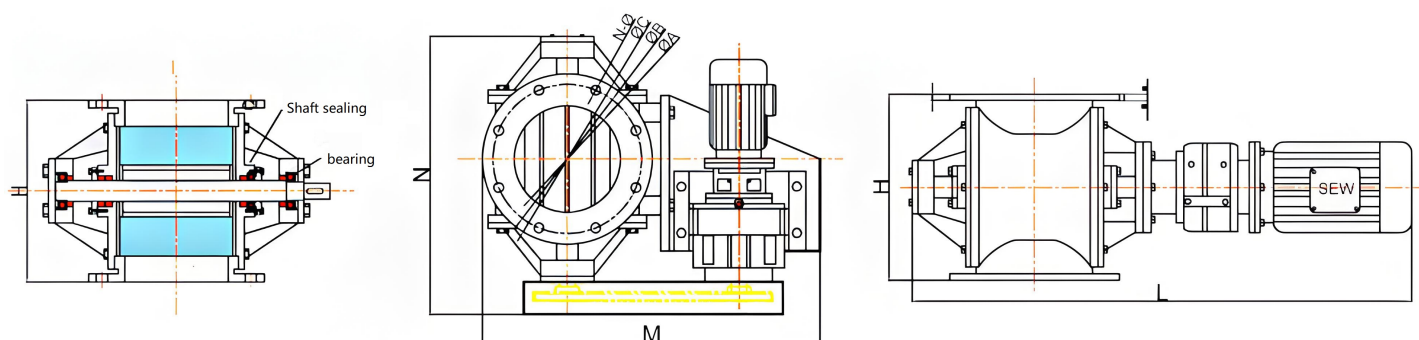

Model	Ltr/Rev	Inlet & outlet			H	L	
		C	B	A			
RVS50	0.5 L/Rev	150	110	50	180	-	4-Φ 14
RVS80	1 L/Rev	150	110	80	220	-	4-Φ 14
RVS100	1.8 L/Rev	200	180	100	240	-	4-Φ 14
RVS150	2 L/Rev	240	200	150	240	850	8-Φ 13
RVS180	4 L/Rev	280	240	180	280	900	8-Φ 13
RVS200	6 L/Rev	300	260	200	300	930	8-Φ 13
RVS220	8 L/Rev	320	280	220	320	950	8-Φ 13
RVS240	10 L/Rev	340	300	240	340	1000	8-Φ 13
RVS260	12 L/Rev	360	320	260	360	1030	8-Φ 17
RVS300	16 L/Rev	400	360	300	400	1080	8-Φ 17
RVS400	26 L/Rev	500	460	400	520	1300	12-Φ 17
RVS440	30 L/Rev	560	500	440	550	1350	12-Φ 17
RVS500	40 L/Rev	620	558	500	620	1500	12-Φ 17

*Note: Technical modification are possible, dimensions in mm

Welcome to customize non-standard rotary valve !!

Features and Function

- Standard Valves manufactured in Stainless Steel
- Drilled flanges in accordance with GB PN10, ANSI 150#, DIN PN10, JIS10K
- Close vane tolerances ensure high sealing and feeding efficiency and minimum air leakage.
- Outboard bearings are standard and a full range of shaft seal options is available
- Excellent performance in high-temperature Applications up to 250°C.
- Pressure differentials up to 1.5bar (21PSI)

Options

- 304,316,304L,316L cast valve housing
- 6 vane, 10 vane or 12 vane rotor.
- Rotor design: close ended, and adjustable-tip
- Replaceable rotor wear tips
- Interior coatings: hard chrome, tungsten, and Teflon
- Air purge shaft sealing
- Valve housing vent ports.
- Accessories: Drop-out box, speed monitor, vent box, Air purge regulation station